

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96180-18VV-T3A

May 31, 2020

GTM96180-18VV-T3A

Information

Model Number

GTM96180-18VV-T3A

Description

GTM96180-18VV-T3A, ITE / Medical Power Supply/Class 2/Household Power Supply, 60601-1-4th Ed. , Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C6 AC Inlet Connector, Class I, Earth Ground (aka "Mickey Mouse"), Output Rating: 18 Watts, Power rating with convection cooling (W) , 5-48V in 0.1V increments, Approvals: IP42; CB 62368; CB 60950; IRAM; Class I; 230V CoC Tier 2; cULus; EAC; Taiwan BSMI; cETLus 60601-1 3rd; CE; China RoHS; Level VI; LPS; RoHS; Ukraine; VCCI; WEEE; PSE; PSE; FCC; CAN ICES-3; cETLus; ETL; CB 60601-1; RCM; S-Mark 60950; CCC; CE; CB 60335; cETLus UL1310; Fuse 60335; Fuse 60335;

Model Picture



Agency Documents

<http://www.globtek.info/certs/GTM96180-TZ/>

CE EC-Declaration

https://www.globtek.com/pdf/ec_declaration/a0Oa000000jSVYEA3

RoHS/RoHS2 Declaration

https://www.globtek.com/pdf/rohs_cert/a0Oa000000jSVYEA3

REACH Declaration

https://www.globtek.com/pdf/iso_certificates/REACH.pdf

Conflict Minerals Declaration

<https://www.globtek.com/pdf/conflict-minerals.pdf>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM96180-18VV-T3A

May 31, 2020

MODEL PARAMETERS


| | |
|--------------------|---|
| Type | Desktop/External |
| Technology | Regulated Switchmode AC-DC Power Supply AC Adaptor |
| Category | ITE / Medical Power Supply/Class 2/Household Power Supply |
| Input Voltage | 100-240V~, 50-60 Hz |
| I/P Amps (A) | 0.6 A |
| Wattage (W) | 18.0 |
| Vout Range (V) | 5-48 |
| Efficiency Level | USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782 |
| Ingress Protection | IP42 |
| Size (mm) | (L)87x(W)47x(H)32mm |

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96180-18VV-T3A

May 31, 2020

ENCLOSURE

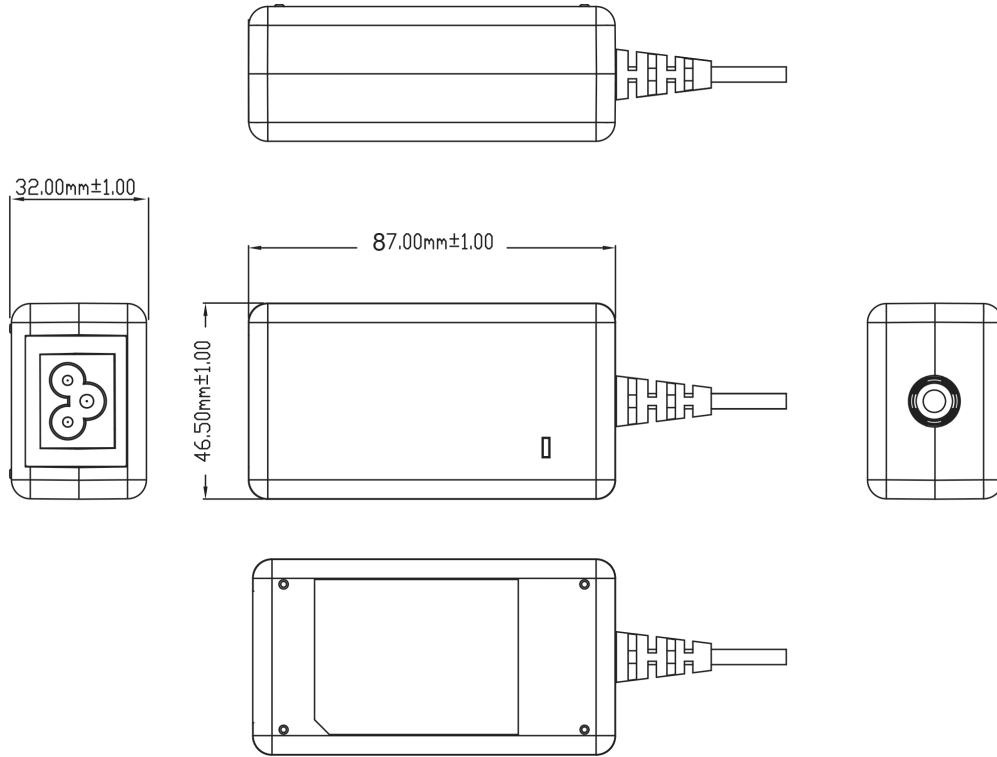

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM96180-18VV-T3A

May 31, 2020

RATING TABLE

| Model Number | Voltage | Amps(A) | Watts(W) | RFQ |
|-------------------------|---------|---------|----------|---------------------|
| GTM96180-1607-2.0-T3A | 5 V | 3.2 | 16.00 | RFQ |
| GTM96180-1807-1.05-T3A | 5.95 V | 3 | 17.85 | RFQ |
| GTM96180-1811-2.0-T3A | 9 V | 2 | 18.00 | RFQ |
| GTM96180-1817.9-5.9-T3A | 12 V | 1.5 | 18.00 | RFQ |
| GTM96180-1817.9-2.9-T3A | 15 V | 1.2 | 18.00 | RFQ |
| GTM96180-1830-12.0-T3A | 18 V | 1 | 18.00 | RFQ |
| GTM96180-1830-10.0-T3A | 20 V | 0.9 | 18.00 | RFQ |
| GTM96180-1830-6.0-T3A | 24 V | 0.75 | 18.00 | RFQ |
| GTM96180-1830-T3A | 30 V | 0.6 | 18.00 | RFQ |
| GTM96180-1848-T3A | 48 V | 0.375 | 18.00 | RFQ |

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96180-18VV-T3A

May 31, 2020

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
 - 90-264 Vac range @ 100% of rated load current
 - 85-264 Vac range @ 85% of rated load current
 - 110-370 VDC range @ 100% of rated load current
02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
03. Output Regulation: +/- 5% measured at the output connector
04. Line Voltage Regulation: +/- 0.5% typical measured at full load
05. Green Power On Indicator LED
06. Output Ripple (Vp-p): 1% or 100 mV whichever is greater, measured at 20 MHz bandwidth with 0.1 uf ceramic capacitor in parallel with a low impedance 47 uf electrolytic capacitor connected at the end of the output connector
07. Turn-ON/OFF Overshoot: 5% maximum, 1 mS typical recovery time for 40% to 70% step load
08. Turn-ON Delay: 1 second maximum @ full load, nominal line
09. Hold-Up Time: 8 mS typical @ nominal input voltage and full load
10. Inrush Current: 30A/60A maximum cold start @ 115/230Vac input
11. Efficiency: Compliant with Efficiency Level VI and CoC Tier 2 standards
12. No Load Standby Power: <0.075 W @ 230Vac

B) PROTECTION

01. Input Protection: Input line fusing and 300Vac MOV
02. Short Circuit/ Overload: Electronically Protected unit will auto recover upon removal of fault
 - Output Current Limit: 110% to 160% of rated output current
 - (upper end of current limit range is determined by normal output power rating, not derated output power level)
03. Output Over-Voltage: 110% to 130% of nominal output voltage

C) SAFETY

01. Dielectric Withstand Voltage: 4000Vac or 5656Vdc from input to output, On Class I models, 3000Vac or 4242Vdc from input to earth
02. Earth Leakage Current: Class I models < 300uA, N/A for Class II models
03. Touch Current: Class I models < 20uA, Class II models < 75uA
04. Output Floating or Earthed option for Class I desktop models.
 - See Output Isolation Options for details
05. Earth Continuity Test: < 0.1 Ohm between Earth Pin at AC input and PCB termination point (Class I models only)
06. Means of Protection: 2 x MOPP
07. Compliant Standards: See listings at end of this drawing for specifics

D) EMC

- EN 60601-1-2, 4th edition
- Emissions, per EN 55032, EN 61000-6-3, EN 61000-6-4
- Conducted Emissions: Class B, FCC Part 15, Class B
 - Radiated Emissions: Class B, FCC Part 15, Class B
- Line Frequency Harmonics EN61000-3-2, Class A
- Voltage Fluctuations/Flicker EN61000-3-3

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<http://en.globtek.com/datasheet/id/a0Oa000000jSVY>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96180-18VV-T3A

May 31, 2020

Immunity, per EN 55024, EN 61000-6-1, EN 61000-6-2
Static Discharge Immunity EN61000-4-2, 10kV Contact Discharge, 20kV air discharge
Radiated RF Immunity EN61000-4-3, 10V/m 80-1000MHz, 3V/m 1-2.7GHz, 80% 1KHz AM.
EFT/Burst Immunity EN61000-4-4, 4kV/100kHz.
Line Surge Immunity EN61000-4-5, 2kV differential, 4kV common-mode
Conducted RF Immunity EN61000-4-6, 3Vrms, 80% 1KHz AM
Power Frequency Magnetic Field Immunity EN61000-4-8, 3A/m
Voltage Dip Immunity EN61000-4-11, Criteria

E) OTHER:

01. MTBF: 1,000,000 Hours @ 40°C ambient temperature, Full load
02. GTM96180 Family: -20°C to 40°C ambient temperature, Full load
Regarding Operating Temperature,
 - a- See below derating table for output power capability at alternate temperature
 - b- Extended low end temperature range available as custom option
03. Operating Humidity: 0% to 95% relative humidity, non-condensing
04. Storage Temperature: -30°C to 80°C
05. Operating Altitude: 5000 Meters
06. Ingress Protection: IP40 standard, IP52 available as special option
07. ROHS: Compliant with latest regulations, see approvals section below

F) ENCLOSURE

01. Housing: High impact plastic, 94V0 polycarbonate, non-vented
02. Markings: Label or Laser Printed
03. AC Input mechanical options: Class II Wall Plug-in, Changeable Blades
Desktop Option, extended housing: C6, C8, C14 or C18 IEC Inlet.

G) SPECIAL OPTIONS


01. Cost reduction, removal of LED
 02. Custom Cordsets, various cordage types, and connector types*
 03. Custom Markings
 04. Short term Output Surge Capability
 05. Reduced Leakage Current versions (10uA max), for CF medical applications, and AC noise sensitive equipment, 15W or less, 5V to 24V output voltage range.
 06. Tightened output voltage tolerance
 07. Reduced output ripple level
 08. Reduced output power rating marking
 09. High Rel PCB laminate with Plated through Holes for IPC610 Class 2 Compliance
 10. Special Housing Colors and Cordset Colors
 11. Quasi Constant Current Output, for Lead-Acid Battery Charger Applications
- * 5Vdc USB output connector power supplies, which use the Micro-B or C-type style connector, have a max output voltage regulation specification of +/-8% (4.6V to 5.4V range).

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96180-18VV-T3A

May 31, 2020

DERATING CURVE

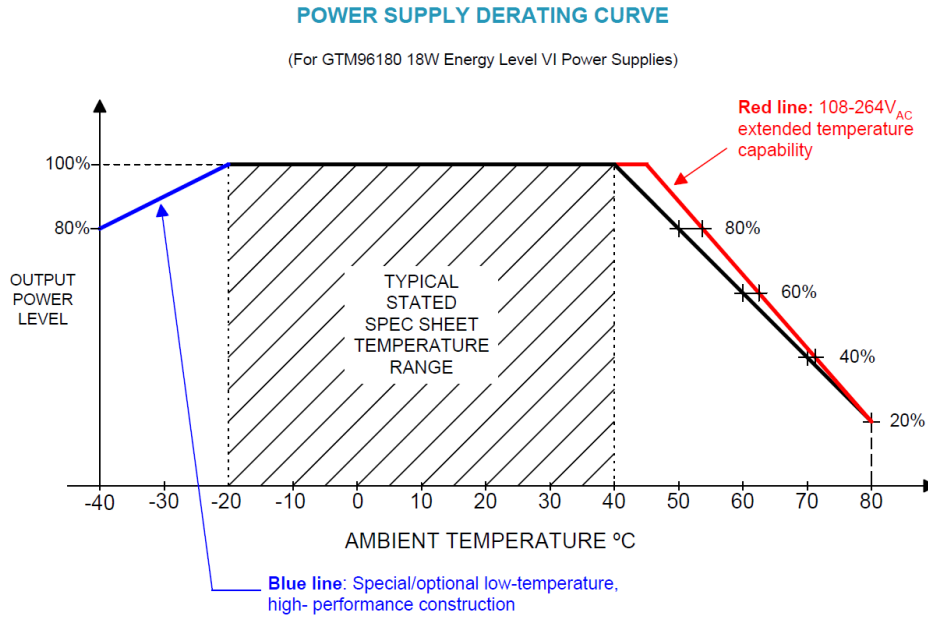


Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96180-18VV-T3A

May 31, 2020

INPUT CONFIGURATION

Description IEC 60320/C6 AC Inlet Connector, Class I, Earth Ground (aka "Mickey Mouse")

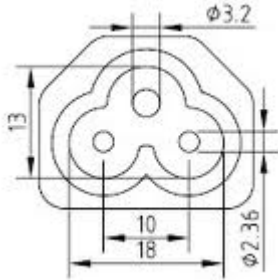

Mates with IEC 60320/C5 Plug

Standard International IEC 320/C5 Cordsets

Below are standard cordsets which are "not included" (unless stated above); these can be purchased separately or package with the power supply. Contact your Sales Engineer if the style required is not shown below. Many more available in different lengths, colors or cable material.

| Part Number / Link | Country | Plug | Connector | Length (mm) | Length (ft) |
|-----------------------------------|----------------------|---|------------|-------------|-------------|
| 3021066F712(R) | N. American (Type B) | NEMA 5-15P | IEC 320/C5 | 1880 | 6 |
| 1191068F0712(R) | N. American (Type B) | NEMA 5-15P Hospital | IEC 320/C5 | 2459 | 8 |
| 2194262M0712(R) | Argentina (Type I) | IRAM 2073 | IEC320/C5 | 2050 | 6.7 |
| 2064262M0712(R) | Australian (Type I) | AS3112 / 3 PRONG | IEC 320/C5 | 2000 | 6.6 |
| 204B4262M0712(R) | Brazil (Type N) | BRAZIL | IEC 320/C5 | 2000 | 6.6 |
| 6023592M5712(R) | China (Type I) | CCC GR2099 | IEC 320/C5 | 2500 | 8 |
| 23144262M0712(R) | Europe (Type E) | CEE 7/7 | IEC 320/C5 | 2050 | 6.6 |
| 2313K3432M0712(R) | Korea (Type F) | KS C 8305 | IEC 320/C5 | 2000 | 6.6 |
| 205IN4262M0712(R) | India (Type D) | India IS 1293 (also known as IA16A3 or BS546) | IEC320/C5 | 2000 | 6.6 |
| 377C4262M0712(R) | Israel (Type H) | ISL | IEC320/C5 | 2050 | 6.7 |
| 23024262M0712(R) | Italy (Type L) | CEI 23-16/VII | IEC 320/C5 | 2000 | 6.6 |
| 3003316F0712(R) | Japan (Type B) | JIS 8303 / 3 PINS | IEC 320/C5 | 1830 | 6 |
| | Japan / USA | JIS 8303 / 3 PINS + | | | |

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM96180-18VV-T3A

May 31, 2020

| | | | |
|---|--|-----------------|-----|
| 3021066F0712ULPSE(R) (Type B) | NEMA 5-15P | IEC 320/C5 1830 | 6 |
| 2054262M0712(R) | S. Africa (Type D) South Africa SABS164-1 (6A type plug) | IEC320/C5 2050 | 6.7 |
| 2084262M0712(R) | S.Africa (Type M) South Africa SABS164-1 (16A type plug) | IEC 320/C5 2000 | 6.6 |
| 23214262M0712(R) | Switzerland (Type J) SEV 1011 (EL 203) | IEC 320/C5 2000 | 6.6 |
| 3003316F0712(R) | Taiwan (Type B) BSMI | IEC 320/C5 2000 | 6.6 |
| 6104262M0712(R) | UK, Hong Kong, Singapore, Gulf States (Type G) BS1363 | IEC 320/C5 2000 | 6.6 |

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96180-18VV-T3A

May 31, 2020

OUTPUT CONFIGURATION

Common output connector options:



L Type (Coaxial 5.5x2.5mm plug)



C Type (Coaxial 5.5x2.1mm plug)



K Type (Coaxial 3.5x1.3mm plug)



LL Type (5.5x2.5mm Locking 760k type)



CL Type (5.5x2.1mm Locking S761k type)



ML2 Type (Molex housing 43025-0200)



YL3 Type (KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ RC-5320A type connectors)



MSB Type (Micro USB)



USBC Type (USB Type C)



Inquire for custom design


For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.

Model:GTM96180-18VV-T3A

May 31, 2020










Approvals

| Logo | Description |
|---|---|
| No Logo Applicable | EU 230V CoC Tier 2, 278/2009, Mar 2014 |
|  | Book 60335 up to 36 Volts |
|  R32282 RoHS(Pb) | BSMI Taiwan GTM96180-18VV-T3(A) (5V, 6V, 7.5, 9V, 12, 15V, 18, 19V, 20V, 24V, 30, 48V) CN13438, CN14336 http://www.bsmi.gov.tw/wSite/ct?xItem=4072&ctNode=8167=2 |
| No Logo Applicable | IEC 60601-1:2005 (Third Edition) + CORR. 1 (2006) + CORR. 2 (2007) + AM1 (2012) or IEC 60601-1 (2012 reprint) (Ed 3.1) |
| No Logo Applicable | CB for IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013 |
| No Logo Applicable | CB for IEC 62368-1:2014 (Second Edition) |
|  | CCC to GB4943. 1-2011; GB9254-2008; GB17625. 1-2012 with Tropical and Altitude up to 5000 m approval. |
| No Logo Applicable | IEC 60335-1:2010 (Fifth Edition) incl. Corr. 1:2010 and Corr. 2:2011 + A1:2013 |
|  | CE Mark: tested to comply with EN 55032:2012+AC:2013, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 55024:2010, EN 60601-1-2:2015 |
|  | CE Certification CE Mark: tested to comply with EN 55032.2012+AC.2013 EN 61000-3-2.2014 EN 61000-3-3.2013 EN 60601-1-2.2015 EN 55024.2010 |
| | Information Technology Equipment Safety Part 1: General Requirements (UL 60950-1 Issued: 2007/03/27, Ed: 2 Rev: 2014/10/14) |

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96180-18VV-T3A








May 31, 2020

| | |
|--|--|
|  | Information Technology Equipment Safety Part 1: General Requirements (CSA C22.2 No. 60950-1 Issued: 2007/03/27 Ed: 2 (R2012) Amd. |
| Conforms to ANSI/UL Std. 60950-1 Cert. to CAN/CSA Std. C22.2 NO. 60950-1 | Conforms to ANSI/UL Std. 60950-1 2nd Edition Cert. to CAN/CSA Std.C22.2 NO.60950-1 2nd Edition |
|  Class 2 Power Unit | cETLus-Cert 4007497 UL1310 Recognized Component up to 36 volts |
|  | AAMI ES60601-1 Issued: 2012/08/20 Medical Electrical Equipment - Part 1: CAN/CSA-C22.2 No.60601-1:14, Third Edition Issued: 2014/03/01 - Medical Electrical Equipment - Part 1: IEC 60601-1-11 Issued: 2015/01/20 Ed. 2 Medical Elec. Equip.- Part 1-11: |
|  | CHINA SJ/T 11364-2014, China RoHS Chart: http://en.globtek.com/globtek-rohs.php |
|  | UL 60950-1, 2nd Edition, 2014-10-14 (Information Technology Equipment - Safety - Part 1: General Requirements) CAN/CSA C22.2 No. 60950-1-07, 2nd Edition, 2014-10 (Information Technology Equipment - Safety - Part 1: General Requirements) 9V only |
|  | Declaration ДС № EAЭC N RU Д-US.KA01.B.10453_19 Custom Union of Russia, Belarus and Kazakhstan http://www.globtek.com/redirect/?loc=gost-certificate-eac-declaration |
|  | Energy verified for GTM96180-1811-2.0-T3A |
|  | Compliance of this power supply with FCC Part 15, Class B has been demonstrated with a standard output load. The FCC law stipulates that system-level testing is required to demonstrate compliance with the FCC emission limits with the actual system load. |
|  | Fuse 60335 T1.6A 250VAC Up to 36 volts |
| | Compliance of this PSU with Industry Canada, Class B demonstrated with a standard |

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM96180-18VV-T3A

May 31, 2020

| | |
|---|--|
| CAN ICES-3(B)/NMB-3(B) | output load. The ICES law stipulates that system-level testing is required to demonstrate compliance with the ICES-3 emission limits with the actual system load. |
|  | Indoor Use Only - Mark is on the label or Molded in the case |
| IP42 | Ingress Protection: ?IP42 to IEC60529:2001 Protection against granular foreign bodies - Protected against direct sprays up to 15o from the vertical Optional |
|  DC-E-G71-002.7 PRECAUCION: PARA USO EN EQUIPOS ELECTRONICOS SOLAMENTE | IRAM certificate DC-E-G71-002.8 to IEC 60950-1:2005 + A1:2009 +A2:2013 |
|  GlobTek, Inc. | JAPAN TUV R-PSE, Cert. No. JD 50314327, to J60950-1(H26) , J55022(H22),J3000(H25)[15V or less]. Please reference the following website for guidelines on PSE regulations: http://en.globtek.com/importing-ite-and-medical-power-supplies-ac-adaptors-to-japan/ |
|  GlobTek, Inc. | JAPAN TUV R-PSE, Cert. No. JD 50314327, to J60950-1(H26) , J55022(H22),J3000(H25)[DC15?30V]. Please reference the following website for guidelines on PSE regulations: http://en.globtek.com/importing-ite-and-medical-power-supplies-ac-adaptors-to-japan/ |
| EFFICIENCY LEVEL  | Efficiency: complies to section 301 of Energy Independence and Security Act (EISA) complies with Energy Star tier 2 (North America), ECP tier 2 (China), MEPS tier 2 (Australia), Code of Conduct (Europe) |
| LPS | Limited Power Source 60950 |
|  | Morocco SDoC declaration http://www.globtek.info/certs/Morocco%20SDoC%20Declaration/ |
|  | RCM certificate SAA-161679-EA; Australia and New Zealand Regulatory Compliance, Mark (http://rcm.standards.org.au/rcmfaq/rcmfaq.htm) |
| | Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment |

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM96180-18VV-T3A

May 31, 2020

| | |
|--|---|
| RoHS | 2015/863-EU (ROHS-3) http://www.ce-mark.com/Rohs%20final.pdf |
|  | S-Mark Certificate EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011+A2:2013 (http://www.intertek.com/marks/s/) |
|  10276 | Ukraine UKRSepro (Document: www.globtek.com/html/iso_certificates/GT_Ukraine.pdf) |
|  | Japan: Voluntary Control Council for Interference (VCCI) |
|  | WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm) Mark is on the label or Molded in the case |